


Heavy Duty Double Bale Tipper (DBBH)


- Minimum 95 horse power tractor requirement
- Can be used both on front and back of tractor for carrying 4 bales

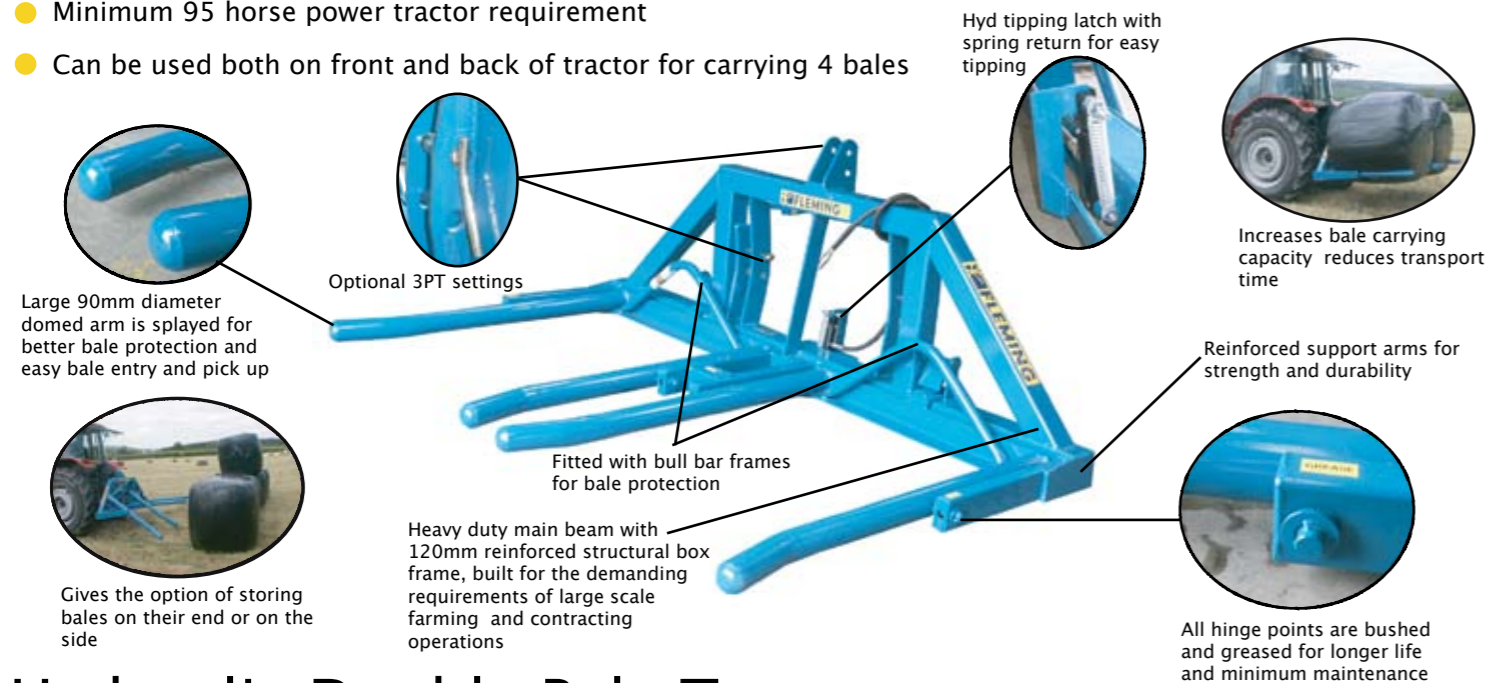

Hydraulic Double Bale Transporter (DBHYD)

Designed to give maximum protection to the wrapped bale while increasing the speed of collecting and delivering bales from the field to the storage area. By lifting the first bale on the hydraulic side of the double lifter, then operating the hydraulic ram, the bale can be raised to give sufficient ground clearance to collect the second bale with ease. When the second bale is collected, the first bale is lowered for transporting and unloading.

- Requires 95+ horse power tractors
- Designed for transporting and stacking bales on their side

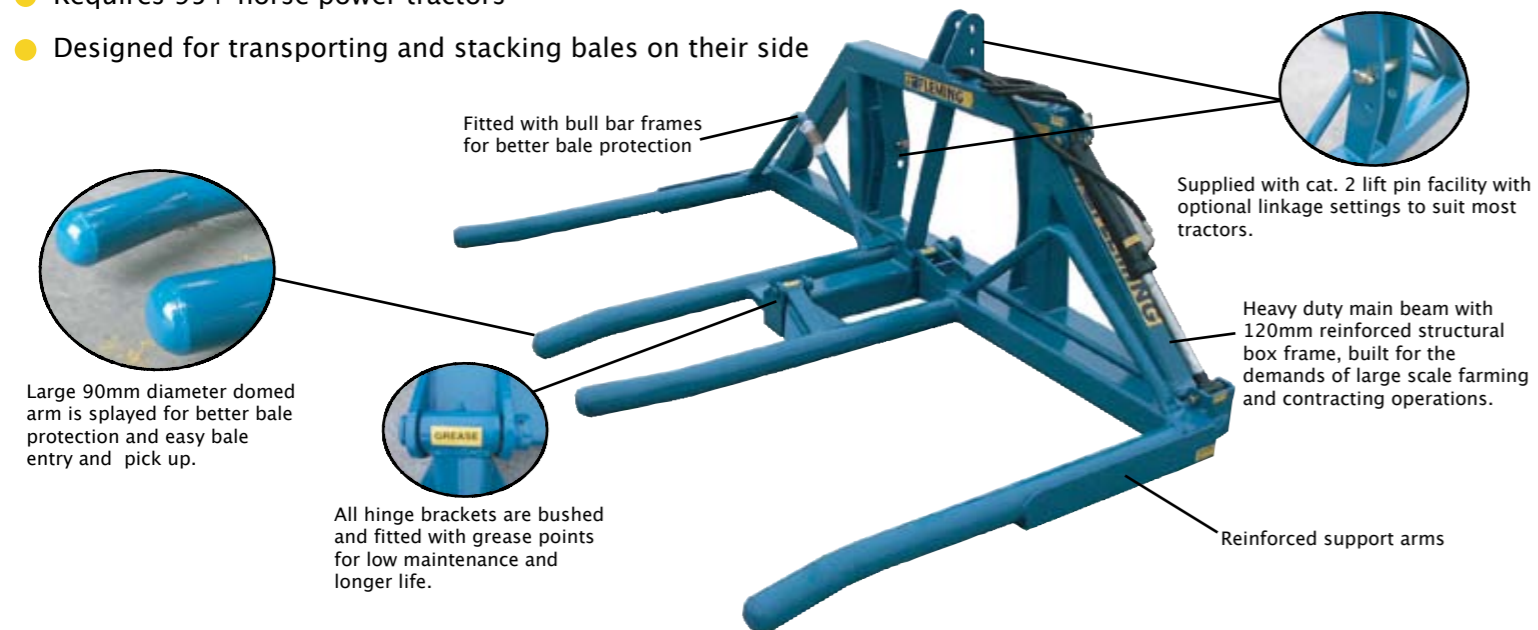

Can collect 2 wrapped bales without having to pick and place them for collection



Due to a policy of continual improvement the company reserve the right to change price or specification without notice

FLEMING AGRI-PRODUCTS LTD Newbuildings Industrial Estate, Newbuildings, Northern Ireland BT47 2SX
 Tel: +44 (0)28 7134 2637 Fax: +44 (0)28 7134 4735 Email: info@fleming-agri.co.uk www.fleming-agri.co.uk

Bale handling



Single Bale Tippers

Double Bale Tipper

Square Bale Handler

Big Bale Grabber

Single Bale Spike

Double Bale Spike

Round Bale Stacker

Hydraulic Double Transporter

Square Bale Handler (SQBH)

With variable chamber

- Strong robust structural box frame for heavy workload
- Large diameter clamping bar for safe transport of bales
- Unique double action clamping arm for easy stacking
- Heavy duty double acting hydraulic cylinder for positive clamping
- Simple adjustment to suit bales from 0.7m (2ft 4 inch) – 1.2m(4ft)



Big Bale Grabber (BGRAB)

- Designed so that bales can be stacked on either end or side
- Large diameter 75mm clamping arms, grab a larger proportion of the bale than any other grabber, giving more positive grip and better protection to the bale
- Strong enough to be used on a mechanical handler, light enough to be used on a tractor loader
- Removal of simple locking pin, allows for free movement of both arms for better bale protection when stacking bales close together.



Round Bale Stacker (BBSTAC)

Large domed 90mm revolving arms protect the plastic when collecting and stacking bales.

Roller arms are bushed and have concealed grease points for smooth and silent operation



Roller arms can be easily removed to reveal 2 spikes for transporting 2 bales of straw.



Bull bar protects the tractor and driver when loading bales at a height. Open bull bar protects the plastic and gives clear visibility for collecting the bale.

All pivot points are bushed and fitted with grease points for smooth operation.



Copes easily with mis-shaped bales

Single Bale Tippers

Fleming's are the only company to offer a Heavy Duty Single Bale Lifter for contracting use and a Standard Single Lifter for normal farming use. Bales stored on their side rest on 4 layers of plastic, bales stored on their end, rest on 20 layers of plastic resulting in better fodder protection in storage and also from contamination from animals such as rats, birds etc.


Heavy Duty Single Bale Tipper (HDBBT)

- Designed to transport 1.25m (4ft) diameter bales of wrapped silage or hay for large farms and contracting use
- Designed to store the bales on their end, the finely counter-balanced tipping mechanism automatically resets itself after tipping the bale

Supplied with cat. 2 lift pin facility with optional linkage settings to suit most tractors.



Reinforced close couple linkage keeps the bale and the weight close to the tractor for better balance.

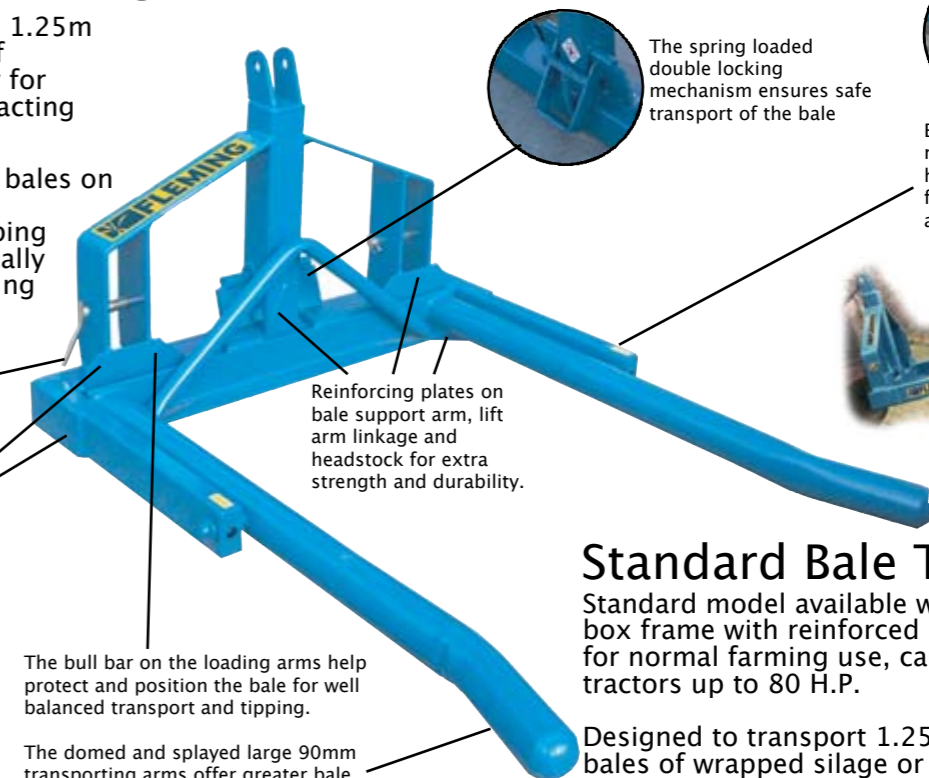

The bull bar on the loading arms help protect and position the bale for well balanced transport and tipping.

The domed and splayed large 90mm transporting arms offer greater bale protection when loading and transporting.

Reinforcing plates on bale support arm, lift arm linkage and headstock for extra strength and durability.

The spring loaded double locking mechanism ensures safe transport of the bale



Easy access to the grease nipples on the bushed hinge point mechanism for smoother operation and longer life.

Standard Bale Tipper (SBBT)

Standard model available with 90mm structural box frame with reinforced side plates designed for normal farming use, carrying bales on tractors up to 80 H.P.

Designed to transport 1.25m (4ft) diameter bales of wrapped silage or hay for normal farming use only.


Supplied with cat. 1 and 2 lift pin facility

Bale Spike

Models available Single Spike and Front Loader Spike.

The Fleming twin tine Bale Spike is designed to pierce the bale of straw or silage 300mm (12") below the centre of the bale so that the main weight of the bale is supported by the heavy duty tines for secure and safe transport.

The unit is available for 3 point linkage c/w cat. 2 lift pins or Front loader use. Tine sockets are bushed into a heavy duty structural box frame for secured strength in operation.

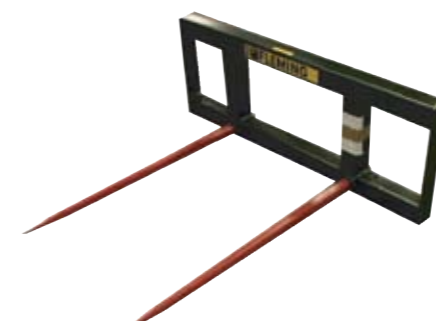

(FLS) Front loader spike



(UBS) 3PT linkage spike