

Hydraulic Folding Rollers

Available in 5.5m (18ft) model with 750mm (30 inch) diameter drums

- Can be filled with water for extra weight and can be transported fully laden
- Heavy duty 12mm drum wall thickness
- All drums are air tested after welding
- Heavy duty construction throughout with unique hinged draw-bar
- Fitted with spring steel shaft
- 2 minute change over from working to transport mode
- Transport width 2.7m
- Lights fitted as standard
- Independent floating rollers for constant ground pressure
- All hinge points easily accessible for greasing
- Hardwood bearing absorbs impact for longer life
- Hardwood bearing for easy greasing and low cost maintenance
- Performance; 25–28 acres per hour
- 100 – 110 horse power required
- Wheels 400 by 15.5



Specifications

| Landroller | 18*30*1/2 | 8ft Tandem | 10ft Tandem | 10*30*3/8 | 10*36*1/2 | 9*36*5/8 | 9*36*1/2 | 8*36*1/2 | 8*30*1/2 | 8*30*3/8 | 8*24*1/4 | 6.6*24*1/4 | 5*24*1/4 | 4*24*1/4 |
|---------------------|----------------------------|------------|-------------|-----------|-----------|----------|----------|----------|----------|----------|----------|------------|----------|----------|
| Rolling Width | 5.4m | 4.84m | 6m | 3m | 3m | 2.74m | 2.74m | 2.42m | 2.42m | 2.42m | 2.42m | 1.98m | 1.50m | 1.25m |
| Overall Width | 5.65m | 5.24m | 6.25m | 3.22m | 3.22m | 2.95m | 2.95m | 2.62m | 2.62m | 2.62m | 2.62m | 2.18m | 1.71m | 1.45m |
| Drum Diameter | 745mm | 740mm | 740mm | 740mm | 885mm | 890mm | 885mm | 885mm | 745mm | 740mm | 590mm | 590mm | 590mm | 590mm |
| Drum Thickness | 12mm | 10mm | 10mm | 10mm | 12mm | 16mm | 12mm | 12mm | 10mm | 10mm | 6mm | 6mm | 6mm | 6mm |
| Side Wall Thickness | 5mm | 5mm | 5mm | 5mm | 6mm | 6mm | 6mm | 6mm | 5mm | 5mm | 5mm | 5mm | 5mm | 5mm |
| Pick up Ring | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | JAW | JAW |
| Three P.L | NO | NO | NO | NO | NO | NO | NO | NO | YES | YES | YES | YES | NO | NO |
| Centre Shaft | 65mm Carbon Steel | 65mm | 75mm | 75mm | 75mm | 75mm | 75mm | 65mm | 65mm | 65mm | 50mm | 50mm | 50mm | 50mm |
| H.Wood Bearing | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| Grease Points | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| Unladen Weight | 3000kgs | 1940kgs | 1170kgs | 1760kgs | 1000kgs | 1180kgs | 1075kgs | 970kgs | 775kgs | 685kgs | 400kgs | 320kgs | 227kgs | 200kgs |
| Laden Weight | 5450kgs | 4150kgs | 4500kgs | 2248kgs | 2970kgs | 2980kgs | 2875kgs | 2770kgs | 1880kgs | 1790kgs | 1100kgs | 900kgs | 805kgs | 565kgs |
| Scraper Blade | Standard on centre drum | Standard | Standard | Optional | Optional | Optional | Optional | Optional | Optional | Optional | Optional | Optional | Optional | Optional |
| Wheel Kit | Standard | N/A | N/A | N/A | N/A | Optional | Optional | Optional | N/A | N/A | N/A | N/A | N/A | N/A |

Due to a policy of continual improvement the company reserve the right to change price or specification without notice

We strongly recommend that all water ballast rollers are drained over the winter months

FLEMING AGRI-PRODUCTS LTD Newbuildings Industrial Estate, Newbuildings, Northern Ireland BT47 2SX
Tel: +44 (0)28 7134 2637 Fax: +44 (0)28 7134 4735 Email: info@fleming-agri.co.uk www.fleming-agri.co.uk

Landrollers



Hydraulic Folding Rollers

Hydraulic Lifting Rollers

Trailed & Three Point Linkage Landrollers

Fleming's have been manufacturing landrollers for over 40 years, resulting in a wealth of technical experience in this field. The model range now stretches from 1.2m – 6m in widths, diameters of 590mm, 740mm and 890mm with wall thicknesses from 6mm–16mm.

Designed initially for agricultural grassland and cereals, Fleming rollers are now used on a wide variety of applications, from parkland & sports fields, Horse menage and gallops, for horticultural use as well as the manufacture and maintenance of golf courses and sports pitches.

Compact Tractor Landrollers

Compact tractor rollers have a 590mm (2ft) diameter drum with 6mm wall thickness. Ideal for hobby farming, parkland, sports pitches, horse menages, horticultural use etc.



1.25m (4ft) and 1.5m (5ft) have optional ball hitch draw bar



2m and 2.5m rollers available with pick up eye and 3 point linkage for easy transport when empty.

590mm roller have hardwood bearings with 50mm steel shaft

Can be filled with water for extra weight. All drums are air tested after welding.

Hydraulic Lifting Rollers

Fleming Agri-Products Ltd have developed a range of hydraulic lifting and folding water ballast landrollers and are the market leaders in the UK and Ireland. All landrollers are manufactured to the highest standard and are available from 2.5m (8ft) to 2.7m (9ft). One of the unique features on the Fleming hydraulic Landrollers is the unique hinged draw-bar, allowing the roller to be elevated to the transport position giving good ground clearance, protecting the machine on rough terrain and cuts transport time to an absolute minimum from farm to farm.


Available in 2.5 (8ft) and 2.7m (9ft) models with 740mm (30inch) and 890mm (36 inch) dia drums with 12–16mm wall thickness



- Can be filled with water for extra weight and can be transported fully laden
- Heavy duty frame and unique Fleming hinged draw-bar & spring steel shaft
- All drums are air tested after welding
- 30 second change over to transport position
- Hardwood bearing provides better shock absorption giving longer life
- Hardwood bearing for easy greasing and low cost maintenance
- Scraper blade standard
- Performance 12–14 acres per hour
- 80 – 90 horse power required

Trailed & Three Point Linkage Landrollers

Available width 2.5m (8ft), 2.7m (9ft), 3m (10ft) with 740mm (30inch) and 890mm (36 inch) diameter drums with 10mm, 12mm and 16mm wall thickness.

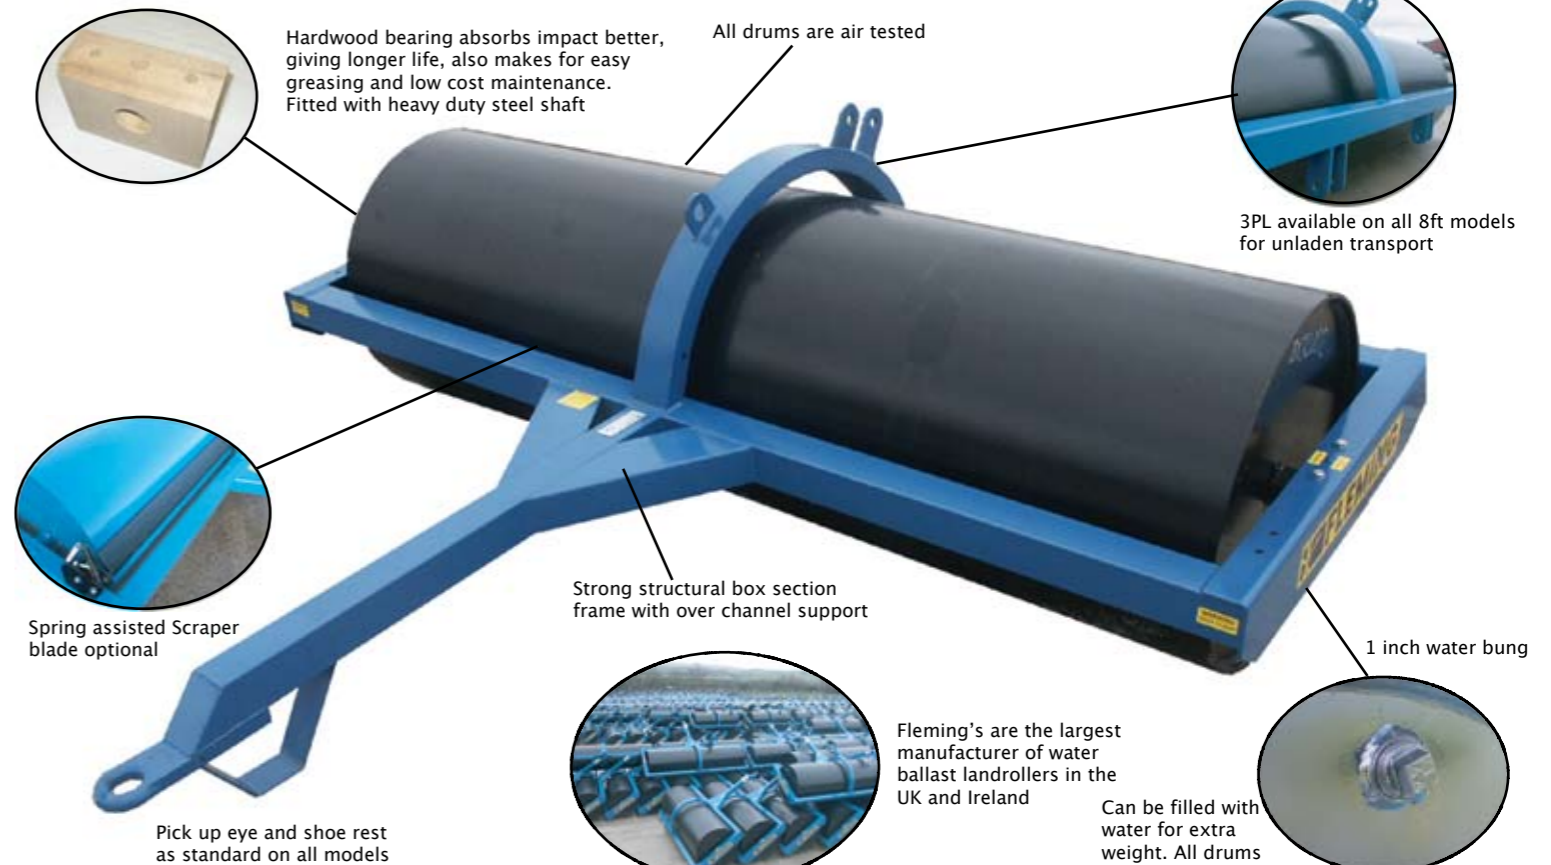


Hardwood bearing absorbs impact better, giving longer life, also makes for easy greasing and low cost maintenance. Fitted with heavy duty steel shaft

All drums are air tested



3PL available on all 8ft models for unladen transport



Spring assisted Scraper blade optional

Strong structural box section frame with over channel support




Fleming's are the largest manufacturer of water ballast landrollers in the UK and Ireland



Can be filled with water for extra weight. All drums are air tested after welding

Pick up eye and shoe rest as standard on all models

Tandem lead Roller

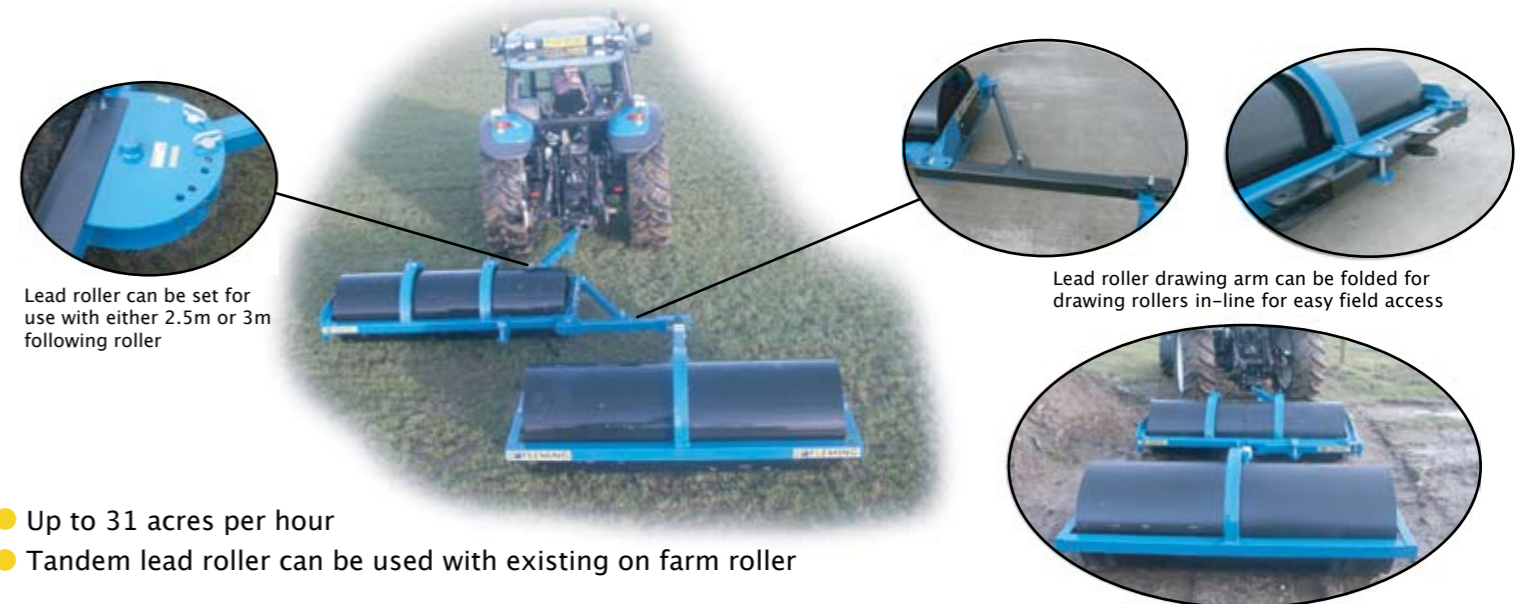

Lead roller can be set for use with either 2.5m or 3m following roller



Lead roller drawing arm can be folded for drawing rollers in-line for easy field access



- Up to 31 acres per hour
- Tandem lead roller can be used with existing on farm roller

We strongly recommend that all water ballast rollers are drained over the winter months

We strongly recommend that all water ballast rollers are drained over the winter months